


NOTES :

1. ALL DIMENSIONS ARE IN MM.
2. ALL BOLT HOLES TO STRADDLE BOTH NATURAL CENTER LINES.
3. UNIT TO BE MOUNTED IN VERTICAL POSITION.
4. ALL SHARP CORNERS SHALL BE ROUNDED OFF WITH SMOOTH RADIUS UNLESS SPECIFIED OTHERWISE.
5. ALL PRESSURE BEARING PLATES SHALL BE SUPPLIED IN NORMALIZED CONDITION.
6. TOLERANCE ON PLATE THICKNESS SHALL BE ON POSITIVE SIDE ONLY.
7. NO NON DESTRUCTIVE EXAMINATION.
8. ALL WELDING EDGES SHALL BE CHECKED FOR CRACKS, LAMINATION OR SEGREGATIONS.
9. NO NON DESTRUCTIVE EXAMINATION.

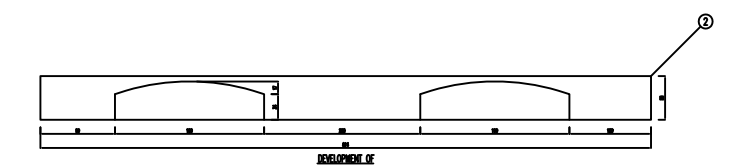

		Total Weight		Wt %
26	Motor Base Support Pins	2	8.000	8.000 (10.1%)
27	Pin, Flat Head	2	2.000	2.000 (2.5%)
28	Pin, Flat Head	2	2.000	2.000 (2.5%)
29	Pin, Flat Head	2	2.000	2.000 (2.5%)
30	Motor Base Plate	1	41.000	41.000 (51.1%)
31	Motor Base Plate	1	41.000	41.000 (51.1%)
32	Motor Motor, 1/2 Hp, 1000 RPM	1	0.110	0.110 (0.1%)
33	Link Screw	2	0.007	0.007 (0.0%)
34	Washer Lock	2	0.002	0.002 (0.0%)
35	Washer Lock	2	0.002	0.002 (0.0%)
36	Washer Lock	2	0.002	0.002 (0.0%)
37	Washer Lock	2	0.002	0.002 (0.0%)
38	Washer Lock	2	0.002	0.002 (0.0%)
39	Washer Lock	2	0.002	0.002 (0.0%)
40	Washer Lock	2	0.002	0.002 (0.0%)
41	Washer Lock	2	0.002	0.002 (0.0%)
42	Washer Lock	2	0.002	0.002 (0.0%)
43	Washer Lock	2	0.002	0.002 (0.0%)
44	Washer Lock	2	0.002	0.002 (0.0%)
45	Washer Lock	2	0.002	0.002 (0.0%)
46	Washer Lock	2	0.002	0.002 (0.0%)
47	Washer Lock	2	0.002	0.002 (0.0%)
48	Washer Lock	2	0.002	0.002 (0.0%)
49	Washer Lock	2	0.002	0.002 (0.0%)
50	Washer Lock	2	0.002	0.002 (0.0%)
51	Washer Lock	2	0.002	0.002 (0.0%)
52	Washer Lock	2	0.002	0.002 (0.0%)
53	Washer Lock	2	0.002	0.002 (0.0%)
54	Washer Lock	2	0.002	0.002 (0.0%)
55	Washer Lock	2	0.002	0.002 (0.0%)
56	Washer Lock	2	0.002	0.002 (0.0%)
57	Washer Lock	2	0.002	0.002 (0.0%)
58	Washer Lock	2	0.002	0.002 (0.0%)
59	Washer Lock	2	0.002	0.002 (0.0%)
60	Washer Lock	2	0.002	0.002 (0.0%)
61	Washer Lock	2	0.002	0.002 (0.0%)
62	Washer Lock	2	0.002	0.002 (0.0%)
63	Washer Lock	2	0.002	0.002 (0.0%)
64	Washer Lock	2	0.002	0.002 (0.0%)
65	Washer Lock	2	0.002	0.002 (0.0%)
66	Washer Lock	2	0.002	0.002 (0.0%)
67	Washer Lock	2	0.002	0.002 (0.0%)
68	Washer Lock	2	0.002	0.002 (0.0%)
69	Washer Lock	2	0.002	0.002 (0.0%)
70	Washer Lock	2	0.002	0.002 (0.0%)
71	Washer Lock	2	0.002	0.002 (0.0%)
72	Washer Lock	2	0.002	0.002 (0.0%)
73	Washer Lock	2	0.002	0.002 (0.0%)
74	Washer Lock	2	0.002	0.002 (0.0%)
75	Washer Lock	2	0.002	0.002 (0.0%)
76	Washer Lock	2	0.002	0.002 (0.0%)
77	Washer Lock	2	0.002	0.002 (0.0%)
78	Washer Lock	2	0.002	0.002 (0.0%)
79	Washer Lock	2	0.002	0.002 (0.0%)
80	Washer Lock	2	0.002	0.002 (0.0%)
81	Washer Lock	2	0.002	0.002 (0.0%)
82	Washer Lock	2	0.002	0.002 (0.0%)
83	Washer Lock	2	0.002	0.002 (0.0%)
84	Washer Lock	2	0.002	0.002 (0.0%)
85	Washer Lock	2	0.002	0.002 (0.0%)
86	Washer Lock	2	0.002	0.002 (0.0%)
87	Washer Lock	2	0.002	0.002 (0.0%)
88	Washer Lock	2	0.002	0.002 (0.0%)
89	Washer Lock	2	0.002	0.002 (0.0%)
90	Washer Lock	2	0.002	0.002 (0.0%)
91	Washer Lock	2	0.002	0.002 (0.0%)
92	Washer Lock	2	0.002	0.002 (0.0%)
93	Washer Lock	2	0.002	0.002 (0.0%)
94	Washer Lock	2	0.002	0.002 (0.0%)
95	Washer Lock			

Alt No.	Suffix	Description	Chgd.	Chkd.	Appd.	Date
Mati. CARBON STEEL		Qty. 1	Part No.		Name	Date
Designation : AGITATOR Clients: NELCON ENGINEERS			DRN BY	SP		07-07-25
			CHKD BY	RS		07-07-25
			APPD BY	DP		07-07-25
		Scale : 1:7.5				
File Size : A1				Dwg. No. agit09m		